

Specifications

Wrapping

Packing method: Stretch wrapping
 Processing capacity: Max. 5kg (11 lbs.)
 *Package size: Width 130 - 380mm (5.1" - 15")
 Height 10 - 150mm (0.4" - 5.9")
 Depth 80 - 260mm (3.1" - 10.2")

*Wrapping speed: Max. 1 package/sec.(60 packages/min.)
 Acceptable film: PVC, Polyethylene
 Number of film roll: Two rolls (auto-switching)
 **Film width: 300 - 500mm (12" - 19.7")

* It may vary depending on the film and trays to use.
 ** Due to machine settings, the width difference between the two films in use has to be 50mm or its increments.

Operation console

Console
 Display panel: TFT LCD color (15") touch panel
 Operation keys: Mechanical keys and touch screen
 Memory capacity for programmable files : 18GB

General


Power source & power consumption: AC220-240V; 50/60Hz; 14A, 2.7kW
 Net weight: Approx. 600kg (1,322 lb)
 Dimensions: W1442 x D3048 x H1532mm (56.8" x 120" x 60.3")
 Operation Humidity: 80% RH (max.) with no condensation
 Length of power cable: 4.5m (177")



W-5600SRX

High-speed in-line automatic wrapping system

Dimensions

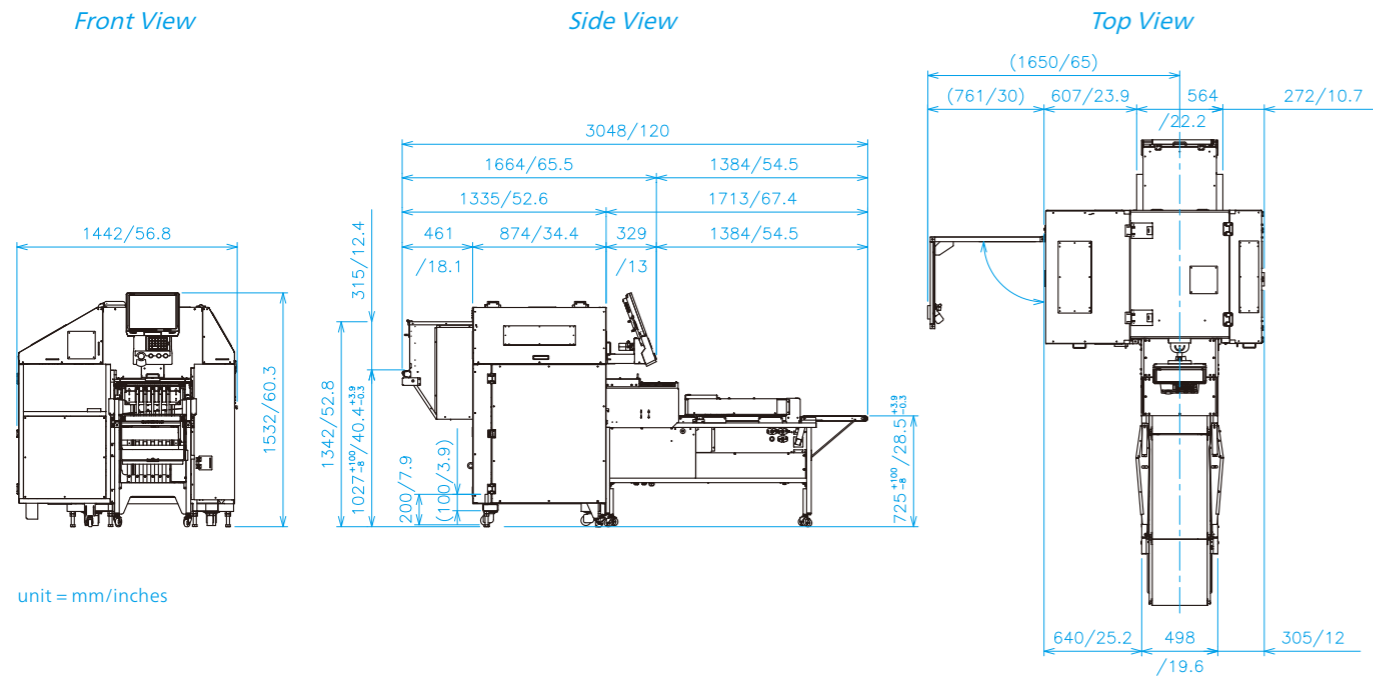

Suggested DIGI labeling machines for W-5600SRX:




Options



*Specifications are subject to change without prior notice.

TERAOKA SEIKO Co., Ltd.
 13-12 Kugahara 5-chome, Ohta-ku,
 Tokyo 146-8580 JAPAN
 www.digisystem.com




A2108WD

Searching for a New Balance

DIGI's ingenuity and world-leading name in food packaging give birth to W-5600SRX, a new high-speed in-line wrapping solution!

The W-5600SRX is an ingenious solution to meet the growing demand for high-mix low-volume production output required in today's food retail. It is the perfect workhorse for central processing facilities, produce packers, etc.

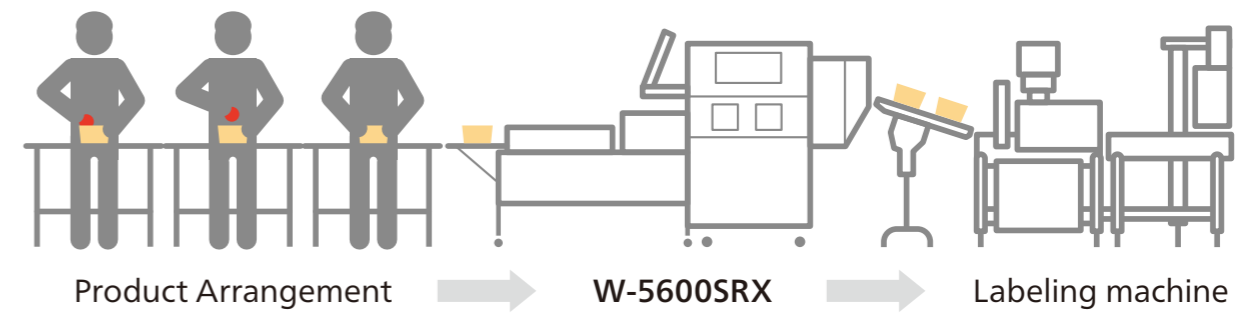

Infeed

Wrap

Outfeed




Higher Productivity

The enhanced wrapping capability and components that minimize machine downtime can double your production to max. of 60 packs per minute on various tray sizes.



Consistent Infeed Tray Alignment

The Alignment Guide's automatic width adjustment feature ensures consistent infeed tray alignment for fast and uniform wrapping finish.

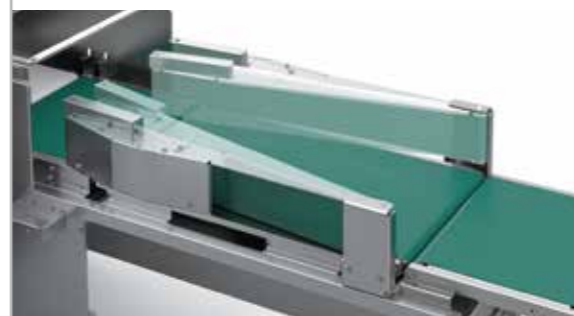

Time & Cost-efficient Packaging Operation

The two-film system auto-selects the right film for the tray in use, to maximize film usage, reduce downtime, and allow labor-free operation.



Firm & Secure Wrapping

The long heated conveyor works in tandem with the tray presser to guarantee tight, secure and beautiful wrapping finish ready for long transport.



Easy Maintenance

Wide openings in the machine casing were designed to allow quick and easy access of the machine's interior for smooth error recovery and maintenance.

